

Current Transformer Model EI-2SFT Series

Window Size 1.13"



Application

- Generally for ammeter use only.

Frequency

- (50 to 400) Hz

Insulation Level

- 600 V, 10 kV AC BIL full wave

Rating Factor


- 1.0 @ 30 °C ambient

Terminals are brass studs No. 8-32 with one flatwasher, lockwasher, and regular nut. Approximate weight is 0.5 lbs.

UL recognized



Catalog Number	Current Ratio	Accuracy @ 60 Hz	Burden VA @ 60 Hz
EI-2SFT-500	50:5	± 3%	1.5
EI-2SFT-101	100:5	± 1%	2.0
EI-2SFT-201	200:5	± 1%	4.0

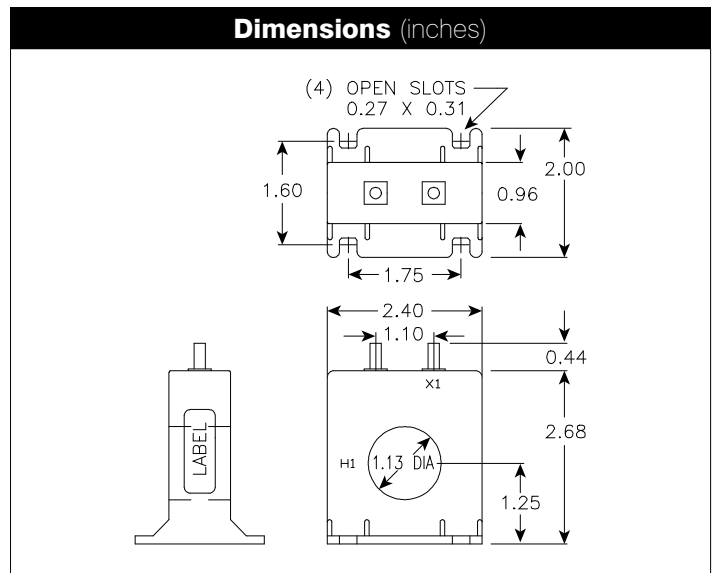

1800 Shames Drive
Westbury, NY, 11590

1-877-EIMETER
(1-877-346-3837)

Tel: 516-334-0870
Fax: 516-338-4741

Email: EIG_sales@hubbell.com
Website: www.electroind.com

