

Current Transformer Model EI-WC2 Series

Window Size 1.00" x 1.40"



Applications

- Ammeters.
- Diagnostics.
- Energy monitoring.

Frequency

- (40 to 400) Hz

Insulation Level


- 600 V AC, 10 kV AC BIL full wave

Thermal Factor

- 6 ft. twisted wire leads.
- Tamper-proof, secured twist-lock connector.
- Abrasion resistance; flexible in low temperature.
- UV-protected outer jacket; weather proof.

Approximate weight is 0.5 lbs.

Catalog Number	Current Ratio	Accuracy @ 60 Hz	Burden VA
EI-WC2-060-RA01	60:1A	1.0	0.21
EI-WC2-100-RA01	100:1A	1.0	0.28
EI-WC2-200-RA01	200:1A	0.5	0.40

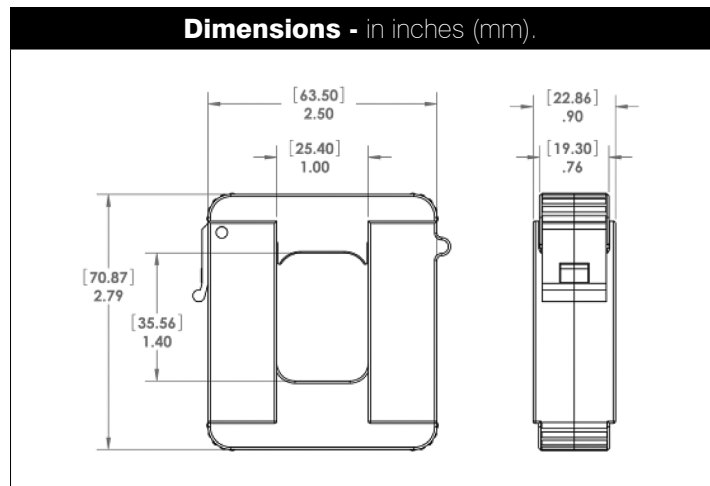

1800 Shames Drive
Westbury, NY, 11590

1-877-EIMETER
(1-877-346-3837)

Tel: 516-334-0870
Fax: 516-338-4741

Email: EIG_sales@hubbell.com
Website: www.electroind.com

