

Current Transformer Model EI-WC6 Series

Window Size 2.00" x 5.50"



Description

The WC6 Series provide precision measurement for sub-metering, controls and energy management without dismantling the main line. Ergonomically designed with secured latches and keying holes, this CT has the largest ID of WC Series making suitable for high load applications.

Features

- 2.0" x 3.5" window opening (ID)
- Double secured latches per side and keying holes
- Built-in tabs for easy removal and installation
- Rigid housing case with UL 94V-0 durable plastic
- 6 foot black/white twisted pair wire leads - 16 AWG
- Wire leads - UL1015, 105 °C, 600 V

Applications


- Energy and submetering products
- Electrical load monitoring
- Network equipment
- Instruments and sensors
- Control systems
- Go GREEN initiatives
- Custom design Turns - Ratio available

Specifications

- Standard Input Current (300 -2000) A
- Frequency (50 - 400) Hz
- Insulation Class 0.6 kV, BIL 10 kV Full Wave
- Continuous Thermal Rating 1.33 at 55 °C
- Meets C57.13 Standard
- Regulatory Listing Agency ETL4004390
- Approximate Weight 2.2 Lbs

Catalog Number	Current Ratio	Burden (VA)	Accuracy @ 60 Hz
EI-WC6-1000-RA05	1000:5	5.00	0.6
EI-W65-1200-RA05	1200:5	5.25	0.5
EI-WC6-1600-RA05	1600:5	6.25	0.5
EI-WC6-2000-RA05	2000:5	8.00	0.5

Dimensions (inches)

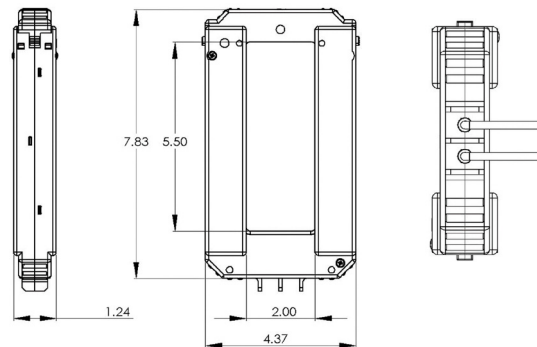

Caution: Before installation, safety precautions must be followed by a licensed professional. Never energize primary unless terminals are short-circuited or burden is connected to secondary



1800 Shames Drive
Westbury, NY, 11590

1-877-EIMETER
(1-877-346-3837)

Tel: 516-334-0870
Fax: 516-338-4741

Email: EIG_sales@hubbell.com
Website: www.electroind.com

