



APPLICATION:

Generally for ammeter use only

FREQUENCY:

(50 to 400) Hz

INSULATION LEVEL:

600 V AC, 10 kV AC BIL full wave

RATING FACTOR:


1.0 @ 30 °C ambient

Terminals are brass studs No. 8-32 with one flatwasher, lockwasher and regular nut.

Approximate weight is 0.5 lbs.

CATALOG NUMBER	CURRENT RATIO	MODEL 2SFT	
		ACCURACY AT 60 Hz	BURDEN VA AT 60 Hz
EI-2SFT-500	50:5	± 3%	1.5
EI-2SFT-101	100:5	±1%	2.0
EI-2SFT-201	200:5	±1%	4.0

Model 2SFT

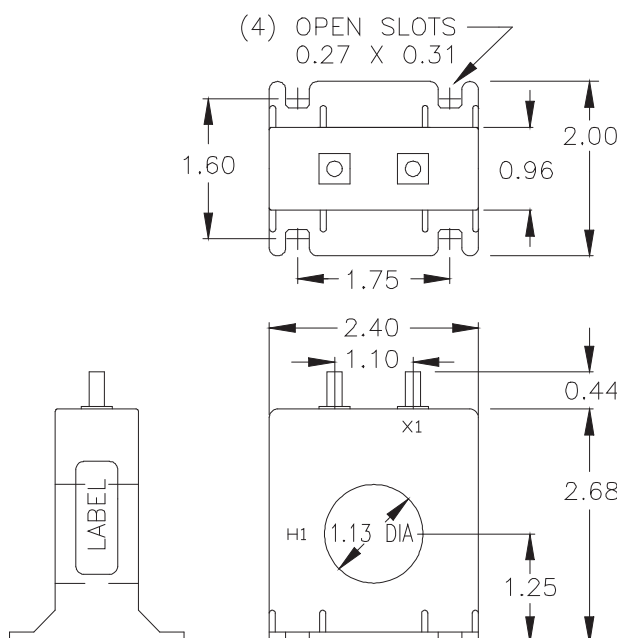

Note: Dimensions are in inches.