



M-7679 R-PAC QUICK REFERENCE GUIDE

PROTECTION, AUTOMATION AND CONTROL SYSTEM FOR RECLOSER, SWITCH, SECTIONALIZER AND ADVANCED DISTRIBUTION AUTOMATION APPLICATIONS.

Override Hot Line Tag function using Front Panel (HMI)



Effective release:
• Firmware 03.29.06
and newer.

Required Tools:

- PC running Windows 7® or higher
- S-7600 IPScom Communications Software

Latest version of IPScom software can be downloaded from:

<https://beckwithelectric.com/products/s-7600/>

Required Documentation:

- M-7679 Instruction Book
- M-7679 Application Guide
- Communications and Cybersecurity A.G.

Latest version of M-7679 Instruction Book can be downloaded from:

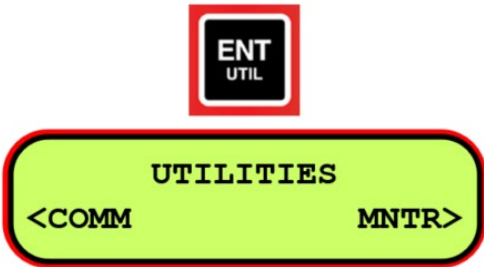
<https://beckwithelectric.com/products/m-7679/>

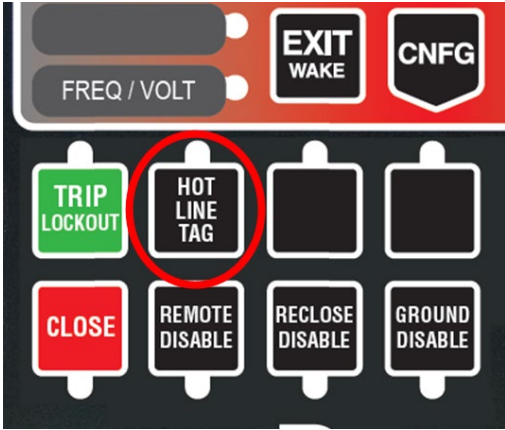


Table of Contents	
Override Hot Line Tag function using Front Panel (HMI)	3

Override Hot Line Tag function using Front Panel (HMI)

Hot Line Tag (HLT) function can only be disabled by the same source that enabled it, either from the control front panel or remotely. However, the following procedure explains how to override the HLT function so the user can disable it using the Front Panel (HMI) when it has been enabled remotely. This feature is available in Firmware version 03.29.06 and Newer.

1	From the Main Screen, press ENT / UTIL . The display will show the main navigation menu.	
2	In Utilities, press ENT / UTIL . The display will show the Utilities submenu.	
3	Press the Right Arrow until the display shows the HLT Enable Override option and press ENT / UTIL .	
4	If HLT is disabled, the display will show that the function is not Enabled and the process will end.	

5	If the HLT function is enabled, the display will show the option to disable it.	
6	If the user press ENT / UTIL the HLT function will be disabled and the display will show that the HLT function is not enabled anymore.	
7	The user can verify that the HLT function is not enabled by checking, in the HMI, the state of the HLT led: - If the LED is OFF, HLT function is Disabled. - If the LED is illuminating Amber, HLT function is Enabled.	
End of Procedure.		



This Page Left Intentionally Blank



[6190 118th Avenue North](#)
[Largo, FL 33773-3724 U.S.A.](#)



[BeckwithElectric.com](#)
[HubbellPowerSystems.com](#)