

3 Phase WYE Voltage Transformer

EI-3VT472-480-208FF



Clear Plastic Cover



Frequency

- 60 Hz

Standard Secondary Voltage

- 120 Volts

Insulation Level

- 600 Volts, 10 kV BIL full wave


Accuracy Class (Per Phase)

- 0.6 W, 1.2 X

Thermal Rating (Per Phase)

- 150 VA at 30 °C amb., 100 VA at 55 °C amb.
Terminals are brass screws No. 8-32 with one lockwasher and flatwasher. Approximate weight is 8 lbs.

Catalog Number	Primary Volts Line/Line	Secondary Voltage		Turns Ratio	Rec. Primary Fuse Rating
		Line/Line	Line/Neutral		
EI-3VT472-480-208FF	480 V	208	120	4:1	1.0

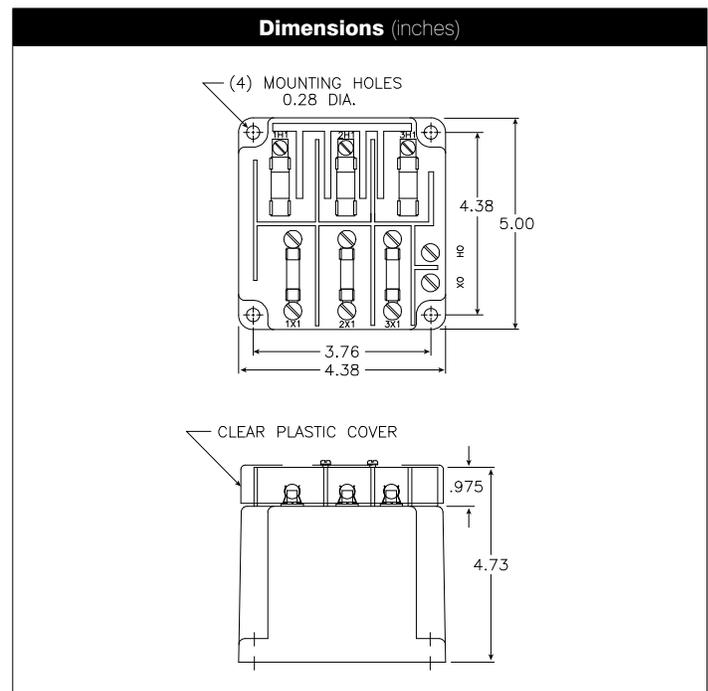

1800 Shames Drive
Westbury, NY, 11590

1-877-EIMETER
(1-877-346-3837)

Tel: 516-334-0870
Fax: 516-338-4741

Email: EIG_sales@hubbell.com
Website: www.electroind.com

