

Current Transformer

Model EI-8RL-162

Window Diameter 3.25"



CATALOG NUMBER	CURRENT RATIO	VA \pm 1% CLASS	ANSI METERING CLASS @ 60 HZ					SECONDARY WINDING RESISTANCE (OHMS @ 75 °C)	CONTINUOUS THERMAL RATING FACTOR	
			B0.1	B0.2	B0.5	B0.9	B1.8		@ 30 °C	@ 55 °C
EI-8RL-162	1600:5A	100.0	0.3	0.3	0.3	0.3	0.6	0.337	1.33	0.8

Application:

Ammeters, wattmeters, and cross current compensation

Frequency:

(50- 400) Hz


Insulation Level:

600 Volts, 10 kV BIL full wave

Flexible leads are IL 1015, 105 °C, CSA approved, #16 AWG, 24" long.

Approximate weight is 2.5 lbs.

Model EI-8RL

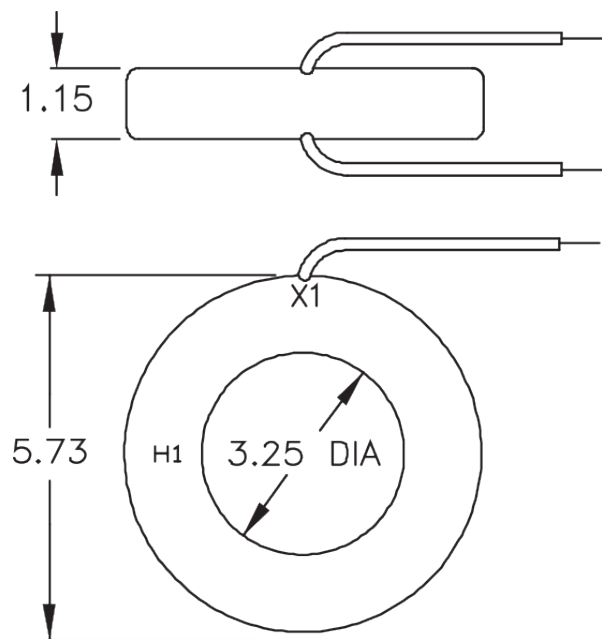

Note: Dimensions are in inches.

