


# Current Transformer

## Model EI-5SFT-401

Window Diameter 1.56"

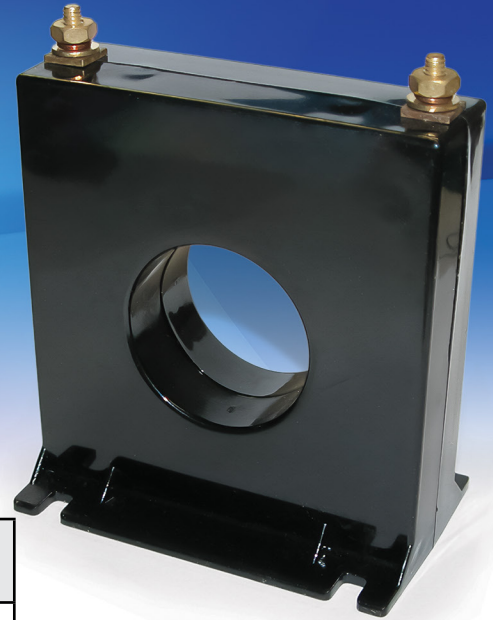

CATALOG NUMBER	CURRENT RATIO	ACCURACY @ 60 Hz	BURDEN VA @ 60 HZ
EI-5SFT-401	400:5A	± 1%	12.5

### Application:

Ammeters, wattmeters, and cross current compensation

### Frequency:

(50 - 400) Hz


### Insulation Level:

600 Volts, 10 kV BIL full wave

Terminals are brass studs No. 8-32 with one flatwasher, lockwasher and regular nut.

Approximate weight is 1.0 lb.

### Model 5SFT

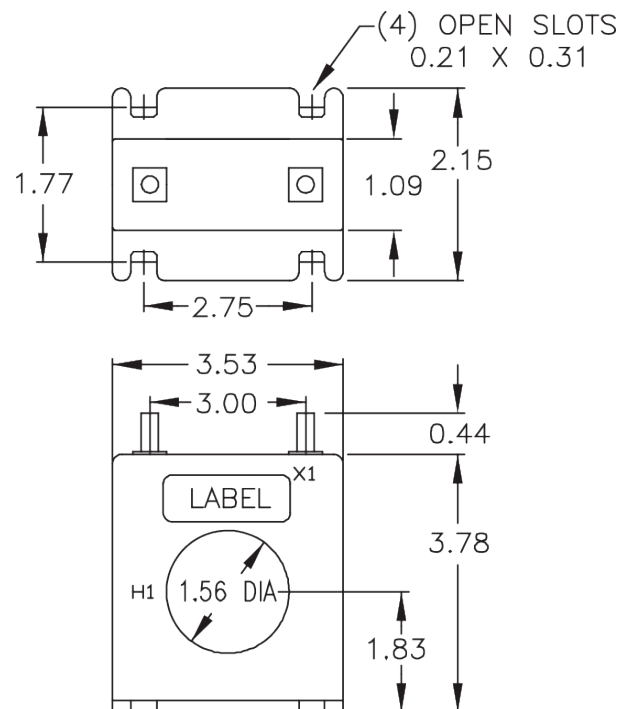

**Note:** Dimensions are in inches.

