

# Pre-wired Enclosure for Form 9S Base Socket Meters

**EI-602U3010C13-1484**



## Description

EIG offers a pre-wired enclosure to be used with the Shark® 270 socket revenue meter, or any Form 9S base transformer-rated meter. This enclosure is perfect for either a retrofit or a new installation. Simply put the enclosure where you want it, install the socket meter into the pre-wired enclosure, then connect your current transformers and voltage references.


## Features

- 13 jaw Form 9S meter socket
- NEMA type 3R indoor/outdoor enclosure
- 600 V Rated
- Comes equipped with a 10 pole FT switch terminal block - tin plated with color-coded handles
- Perfect for Shark® 270 socket meter
- Supports all transformer-rated Form 9S meters
- Lockable cover


## Specifications

- **Size** – W 12" x H 19 7/8" x D 4 3/8".
- **Knockouts** – (Six) 3/4" x 1" x 1 1/4" in bottom, sides, back; (one) 1/4" x 5/8" x 7/8" in bottom.
- **Rating** – 20 A, 600 V AC, transformer rated meters, only.
- **Compliance**
  - NEMA 3R
  - ANSI C12.7
  - UL414 - UL Listing File #E112363
- Ringless one piece cover, lockable with stainless steel swing-latch and hasp. Meter mounting blocks are electrical phenolic.
- Socket terminals accommodate #14 through #6 cu/al wire.
- Meter retainer clips (ringless-style) can be attached to surge brackets to help prevent accidental removal of meter when socket cover is removed.


### Front Dimensions

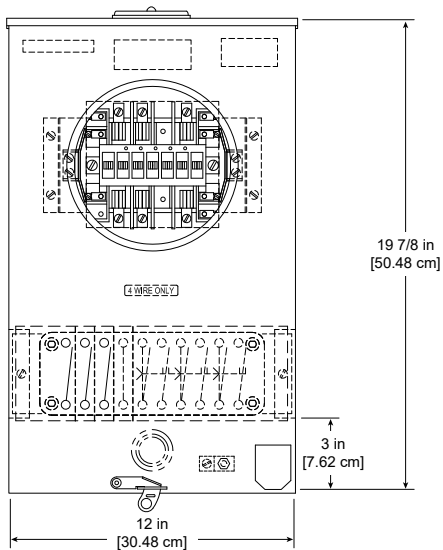

### Side Dimensions

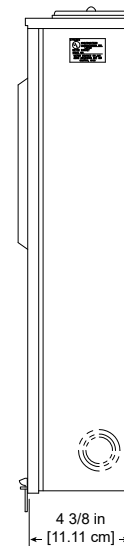

### Wiring Diagram

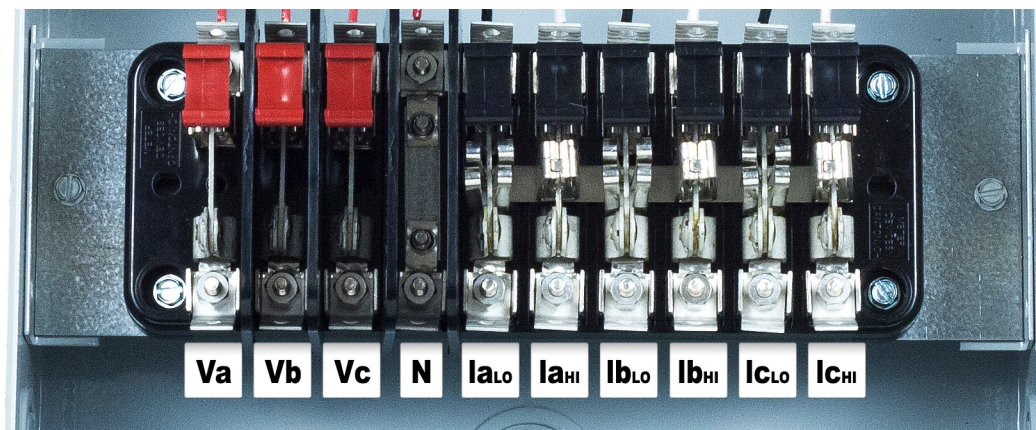

### Ordering Information

**Model:** EI-602U3010C13-1484

Call or email EIG to place order for immediate shipment.

**To order online, visit:**

<https://www.electroind.com/product/9s-socket-form-meter-enclosure/>

1800 Shames Drive  
Westbury, NY, 11590

**1-877-EIMETER**  
(1-877-346-3837)

**Tel:** 516-334-0870  
**Fax:** 516-338-4741

**Email:** [EIG\\_sales@hubbell.com](mailto:EIG_sales@hubbell.com)  
**Website:** [www.electroind.com](http://www.electroind.com)

